



# Product Data Sheet: Green Gripper Woven (GGW)

## PRODUCT DESCRIPTION

GGW is a *Non-Asbestos* woven product for heavy-duty industrial applications. Notable on the test curve are the consistent friction levels and the excellent fade resistance. Recovery is immediate and complete. GGW exhibits high friction under a wide range of temperatures. GGW can be used on wet dry band brakes for industrial use where medium to high friction is required. The product is available in roll form, flat sheet, and custom shapes.

## CHARACTERISTICS

- High Static friction
- Uniform friction
- Non-ferrous metallic
- Immediate and complete recovery
- Good wear rate


## MECHANICAL PROPERTIES

Specific Gravity (SAE J380) : 1.15  
Tensile Strength, PSI (ASTM D638) : 1500<sub>min</sub>

## FRICTIONAL PROPERTIES

Coefficient of Friction (SAE J661):  
Normal\* : 0.50  
Hot\* : 0.46  
Wear Rate (SAE J661)  
(inch<sup>3</sup>/hp-hr) : 0.005  
Friction Code : GG  
Maximum Operating Limits:  
Rubbing Speed\*\* : 5000 fpm  
Pressure\*\* : 200 psi  
Drum Temperature for  
Constant Operation\*\* : 550°F

## SAE J661A TEST CURVES

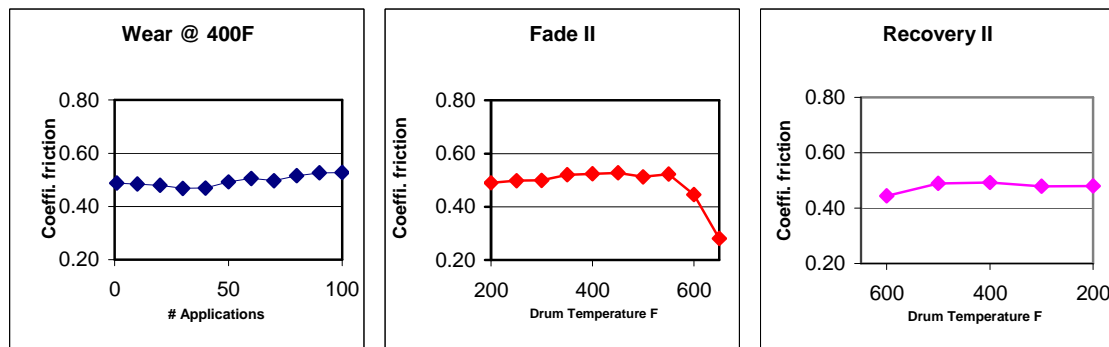

\*Note 1. – Friction values shown are for guide purposes only since values deviate with changes in temperature, pressure and speed. Practical design should include a 25 to 50 percent safety factor.

\*\*Note 2. – Rubbing speed, drum temperature, and pressure are directly related. Changing any one value will change the others. The values shown represent typical conditions, but are not the ultimate limits of the material.